

GC2268 series

筒式综合送料平缝机 系列

Cylindrical bed compound feed lockstitch sewing machine



iHighlead
爱海菱

HIGHLEAD


GC2268 系列筒式综合送料平缝机

本机是专为箱包制造业设计的筒式厚料平缝机。结构坚实，造型新颖。采用滑杆挑线，立式旋梭勾线，构成双线锁式线迹。上下轴用同步齿形带传动；压脚、送布牙、机针同步送料；杠杆式针距调节机构。高压脚行程，高压脚提升间隙和大的线迹长度，配合筒形缝台，适合于缝制布袋、行李箱、座垫，特别适用于箱包的周边作业。

- GC2268筒式综合送料平缝机
- GC2268-1B筒式综合送料平缝机
- GC2268-2B筒式双针综合送料平缝机
- GC2268-2BL长臂筒式双针综合送料平缝机

This cylinder bed heavy duty lockstitch sewing machine is especially designed for production of luggage case and luggage bag, featuring original appearance and rigid structure. It is designed with sliding lever thread take-up, vertical rotating hook, cog belt for driving arm shaft and hook shaft, compound feed by presser foot, feed dog and needle, and lever type stitch regulator. With high presser foot lift, longer stitch length and cylinder bed, it is available to sew luggage suitcase, seat cushion, especially for edge seaming on luggage bags.

- GC2268 Cylindrical bed compound feed lockstitch sewing machine
- GC2268-1B Cylindrical bed compound feed lockstitch sewing machine
- GC2268-2B Two needle cylindrical bed compound feed lockstitch sewing machine
- GC2268-2BL Long arm two needle cylindrical bed compound feed lockstitch sewing machine

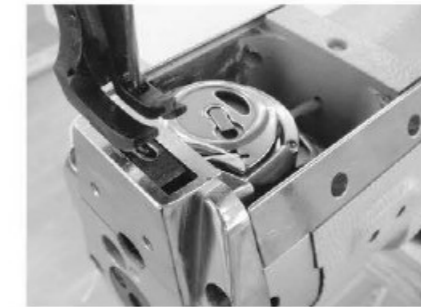

直径71毫米的筒式缝台，对于缝制箱包的周边作业极为圆滑顺利，精密的综合送料机构，使送料特性极为稳定，压紧杆可配装不同的特种内外压脚(需另购)。

Ø71mm cylinder bed and precise compound feed system enables smooth seaming on luggage bag and free feeding. The presser bar can be fitted with different types of special inner and outer presser foot (option sold separately).

型号 Model	GC2268	GC2268-1B	GC2268-2B	GC2268-2BL
最高缝速 Max. sewing speed	2200 r.p.m.	2200 r.p.m.	2000 r.p.m.	1600 r.p.m.
线迹长度 Stitch length	0-6 mm	0-9 mm	0-6 mm	
针杆行程 Needle bar stroke	33.4 mm		36 mm	
挑线杆行程 Thread take-up lever stroke	61.5 mm		74.5 mm	
压脚提升 Presser foot lift	手动 By hand	8 mm	8 mm	气动抬压脚16 mm
	脚控 By foot	14 mm	14 mm	16 mm Pneumatic
压脚 Presser foot	交互压脚 Alternating walking presser foot			
送布牙 Feed dog	单列齿 Single row		双列齿 Twin rows of teeth	
机针 Needle size	DP × 17 18 [#] -22 [#]	DP × 17 18 [#] -23 [#]	DP × 17 23 [#]	
针间距 Needle gauge	○		标准 6.4mm 特殊 3.2 9.5mm Standard 6.4mm Special 3.2 9.5mm	
缝台筒径/长度 Bed size in dia./ Length	71 mm / 222 mm		83 mm / 222 mm	83 mm / 566 mm
旋梭 Rotating hook	立式大旋梭 Large vertical hook			
润滑方式 Lubrication	手工润滑 Manual			
电动机 Motor	370瓦缝纫机专用电机1400转/分 370W Clutch motor 1400 r.p.m.		220伏550瓦伺服电机 220V550W Servo motor	



缝速: 1600-2200转/分
综合送料 筒径71/83mm 长度222-566mm
有单针 双针 长臂双针四种机型
适用于箱包制造业 行李箱 座垫



GC2268 筒式综合送料平缝机



Your Machinery Partner

CSI MIDDLE EAST LLC SHARJAH

سي اس آي ميديل ايست ذ م م الشارقة

PHONE:

+971 6 510 5394

EMAIL: info@csime.ae

WEB: csime.ae